


# RANCO ROOM AIR CONDITIONER CONTROLS

## A22 SERIES ADAPTABLE REPLACEMENT CYCLING A30 CONTROLS FOR ROOM AIR CONDITIONERS

Adaptable control to replace OEM controls which govern the on/off copres-  
sure function. Includes break-off shaft, dial knob, and mounting bracket.

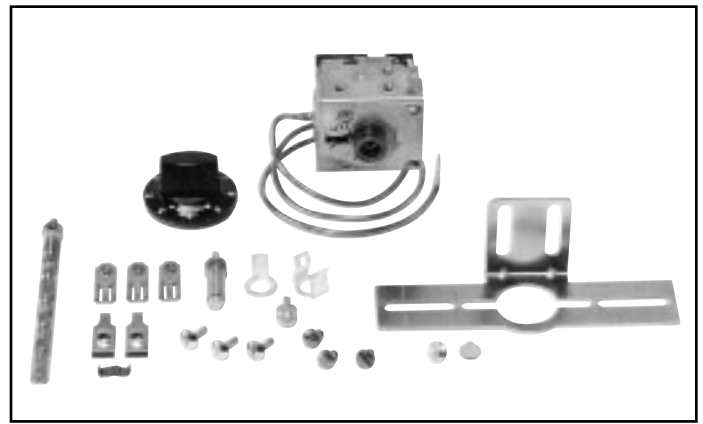

### ELECTRICAL RATING

RATING	24V	120V	240V	277V
A.C. FULL LOAD AMPS	-	20	20	16
A.C. LOCKED ROTOR AMPS	-	80	80	60
A.C. PILOT DUTY (VA)	240	240	240	240
RESISTIVE LOAD AMPS	-	-	-	16

### ORDERING DATA

UNI-LINE ORDER NO.	SWITCH	DIAL RANGE (°F)	DIFF. (°F)	SENSING ELEMENT		POPULAR APPLICATIONS
				LENGTH	CAPILLARY TYPE AND BULB SIZE	
A30-X450	SPST*	58 TO 86	5	-	AIR COIL	
A30-X451	SPST*	58 TO 86	5	36"	STRAIGHT	G.E. WJ28X500 G.E. WJ28X512
A30-X452	SPST*	53 TO 85	5	39"	3/8 X 4" CROSS-AMBIENT	G.E. WJ28X502
A30-X453	SPST*	53 TO 85	5	18"	STRAIGHT	WHIRLPOOL 485760 FRIGIDAIRE 8006445
A22-1114	SPST	60 TO 91	5	54"	1/4 X 6-5/8" CROSS-AMBIENT	
A22-2451	SPDT	45 TO 81	5	27"	STRAIGHT	G.E. WJ28X504†
A22-2453	SPDT	59 TO 90	6	39"	3/8 X 4" CROSS-AMBIENT	G.E. WJ28X505†
A30-2311	SPDT	FIXED SETTING CLOSED AT 60°F OPENS AT 30°F	30	30"	STRAIGHT	EVAPORATOR DE-ICE CONTROL

\* Rated at 30 FLA at 120/240V. † Check electrical rating requirements before using Ranco replacement.