


INDUSTRIAL PROCESS CONTROLS

1015

- 1 SPDT relay
- Up to 48 ON/OFF events per day
- Quick schedule adjustments can be made with 96 self-contained trippers
- Time intervals can be set between 15 minutes and 23-3/4 hours
- Paragon-developed Skip-A-Day feature allows units to be programmed to skip 1 to 7 days without disturbing set program
- Wiping contact blades maintain a consistent contact surface for extended clock life
- Available in NEMA 3 metal enclosure for indoor and outdoor use
- Unit dimensions are 5-3/8" W x 9-5/8" H x 4-3/16" D

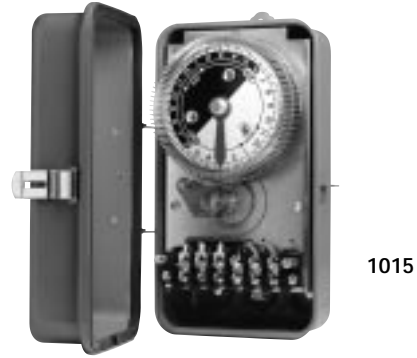

1015

42000

- 1 SPST or DPST relay
- Up to 48 ON/OFF events per day
- Time increments can be set from 15 minutes to 23-3/4 hours
- Sealed motor and wiping contact blades for longer clock life
- Available in NEMA 3 non-metallic enclosure for outdoor use
- Clutched clock dial for easy monitoring of program
- Unit dimensions are 5-3/8" W x 9-5/8" H x 4-3/16" D



42000

TECHNICAL INFORMATION

EJW	with 1 SPST
EJW-M	with 1 SPST
JW	with 1 SPST
1015-00, 1015-40	with 1 SPDT
8025	with 2 NO - 1 NC
42011-00, 42011-20	with 1 SPST
42013-00, 42013-20	with 1 DPST
44001-00	with 1 SPST
44005-00	with 1 SPDT

TIMEKEEPING CAPABILITIES

24-hour process controls and/or industrial process controls.

PROGRAMMING ATTRIBUTES AND CAPABILITIES

Events/Set Points

- 1 event repeatable (JW)
- 48 events in 15-minute intervals (1015 series, 42000 series)
- 12 events with a minimum of 2 hours (8025 series)
- 1 to 7 events every 4 hours (44000 series)

Holidays

Skip-A-Day feature (1015 series)

Override

Manual override (44000 series)

HARDWARE ATTRIBUTES

Display

A dial range from 5 minutes to 60 minutes (JW series), 4-hour dial (44000 series) and a 24-hour (42000 series, 8025 series, 1015 series) dial indicating hour of the day with notations for night and evening hours.

Interface

N/A

Enclosure

- NEMA 3R non-metallic enclosure with clear-view cover (JWPC series)
- NEMA 1 steel or NEMA 3R non-metallic enclosure with clear-view cover (8025 series)
- NEMA 3 steel lockable tamper resistant enclosure (1015 series, 42000 series)
- NEMA 1 steel (44000 series)